

APAC 9000™ SERIES BLOW OUT PREVENTER (BOP)

APAC 9000™ Series Blow Out Preventer (BOP) Complete (45lbs)



List Price:	\$225	
Part Number:	3" 8V x 1-1/8"	(9001)
	3" 8V x 1-1/4"	(9001)
	3" 8V x 1-1/2"	(9001)
	2-7/8" 8RD x 1-1/8"	(9101)
	2-7/8" 8RD x 1-1/4"	(9101)
	2-7/8" 8RD x 1-1/2"	(9101)

APAC BOP Ram

With reinforced metal slot for stem. Use in APAC 9000™ Series and HP-150 BOP.



List Price:	\$19.80	
Part Number:	1-1/8"	(9010)
	1-1/4"	(9011)
	1-1/2"	(9012)

Stem

Stem for adjusting BOP ram. Made out of 4140 high quality grade material.



Gland Nut

Stem


Gland Nut

Made out of 4140 high quality grade material.

List Price:	\$13.00 (9014)	\$4.50 (9015)
Part Number:	Stem (9014)	Gland Nut (9015)


BOP O-Ring

For use with APAC 9000™ Series BOP end caps.

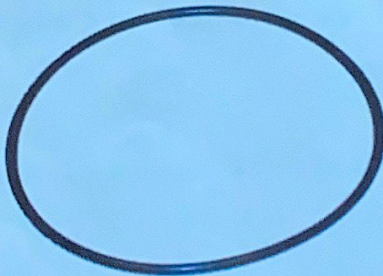

List Price:	\$1.00	
Part Number:	O-Ring	(9016)

APAC 9000™ SERIES BLOW OUT PREVENTER (BOP) DATA

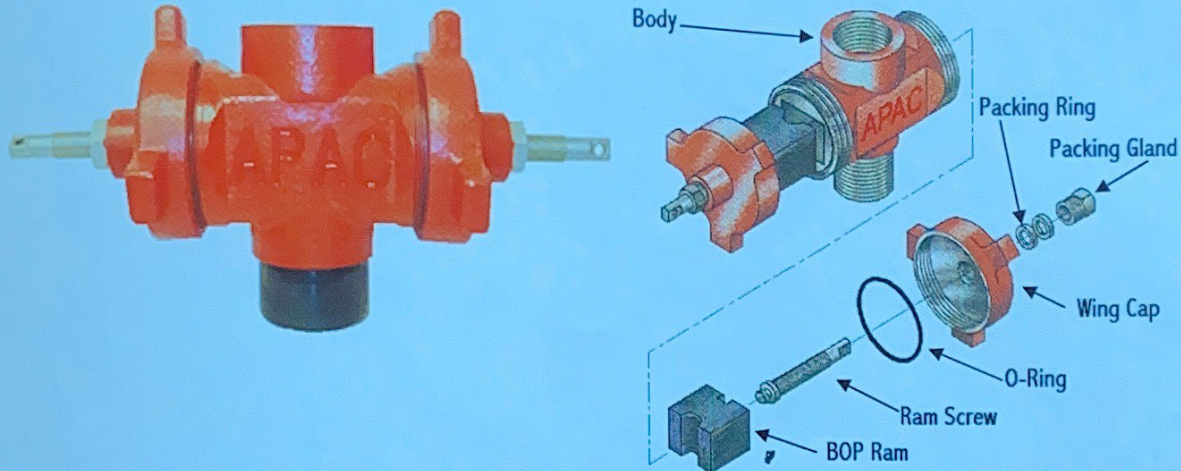

APAC 9000™ SERIES BOP

- APAC VERATON NS-500™ steel reinforced packing.
- Quick easy opening with ACME cap thread that virtually eliminates cross threading.
- Internal threads protected from the environment.
- Blow-out proof ram screw.
- Cap O-rings provide pressure tight seal.
- Full Opening.

APAC 9000™ SERIES BOP SPECIFICATIONS CHART

Available Sizes	2"	2 ½"	3" LP
Vertical Bore	1.975"	2.560"	2.970"
Test Pressure	3000 PSI	3000 PSI	3000 PSI
Working Pressure	1500PSI	1500PSI	1500PSI
Body and Cap Material	Ductile Iron	Ductile Iron	Ductile Iron
Ram Material	VERATON-NS500™	VERATON NS-500™	VERATON NS-500™
Ram Screw and Packing Gland	Carbon Steel	Carbon Steel	Carbon Steel
Ram Sizes	Blind, 5/8" – 1", 1-1/8", 1-1/4", 1-1/2", 1-3/4"		
Ram Screw Packing	Braided Teflon	Braided Teflon	Braided Teflon
Connection	Male x Female Thread	Male x Female Thread	Male x Female Thread
Height	9 ½"	9 ½"	9 ½"
Weight	43 lbs	43 lbs	43 lbs
Width (Rams Open)	20"	20"	20"
Packing Rod Sizes	1-1/8", 1-1/4", 1-5/16", 1-1/2"		